



**R12-Series Companion
Keyboard
Model RKB001
User's Guide**

© 2015 Motion Computing, Inc. All rights reserved.

This document contains information protected by copyright. No part of this document may be reproduced in any form without written consent from Motion.

The information in this document is provided "as is" and is subject to change without notice. Motion is not liable for errors or omissions in this document.

Motion, Motion Computing, View Anywhere, and QuickNav are trademarks or registered trademarks of Motion Computing, Inc. in the U.S.A. and other countries.

Acrobat is a registered trademark of Adobe Systems Incorporated.

Bluetooth is a registered trademark owned by the Bluetooth SIG, Inc., U.S.A. and licensed to Motion Computing, Inc.

Intel, Intel Atom, Core, vPro, and Centrino are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Computrace is a registered trademark of Absolute Software Corp.

OmniPass is a trademark of Softex, Inc.

Realtek is a trademark of Realtek Semiconductor Corporation.

Watcher and Skylight are registered trademarks of Netgear.

Microsoft, Windows, and Windows Journal are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

Qualcomm, Gobi, and Gobi 5000 are trademarks or registered trademarks of Qualcomm Incorporated.

Wi-Fi is a registered trademark of the Wi-Fi Alliance.

HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks of HDMI Licensing LLC in the United States and other countries.

AMI and AMI Aptio are trademarks of American Megatrends, Inc.

End users may not loan, rent, lease, lend, or otherwise transfer the CDs or DVDs provided for recovery purposes to another user, except as permitted in the End User License Agreement for such product.

This product incorporates copy protection technology that is protected by U.S. and foreign patents, including patent numbers 5,315,448 and 6,836,549, and other intellectual property rights. The use of Macrovision's copy protection technology in the product must be

authorized by Macrovision. Reverse engineering or disassembly is prohibited.

Motion Computing, Inc. has made every effort to identify trademarked properties and owners on this page. All brands and product names used in this document are for identification purposes only and may be trademarks or registered trademarks of their respective companies.

The warranties for Motion products are set forth in the express limited warranty statements accompanying such products. Nothing in this document constitutes an additional warranty.

The Motion Computing products and services may be covered by one or more patent-protected inventions. Additional patents may also be pending. For more information, see

www.motioncomputing.com/us/legal/patents.

The end user may access only one operating system language version.

L'utilisateur final ne peut accéder qu'à une seule version linguistique du système d'exploitation.

Der Endbenutzer darf nur auf eine Sprachversion des Betriebssystems zugreifen.

De eindgebruiker heeft slechts toegang tot één taalversie van het besturingssysteem.

L'utente finale può accedere a una sola lingua del sistema operativo.

El usuario final sólo podrá acceder a una versión de idioma del sistema operativo.

Loppukäyttäjä voi käyttää vain yhtä käyttöjärjestelmän kieliversiota.

Användaren har endast tillgång till en språkversion av operativsystemet.

Slutbrugeren har kun adgang til ét af operativsystemets sprogversioner.

Sluttbruker kan aksessere kun én av operativsystemets språkversjoner.

O utilizador final pode alcançar somente uma versão de língua do sistema de exploração.

O usuário final pode acessar apenas uma versão de idioma do sistema operacional.

Model RKB001

PN 024-02-0537-A00

Contents

Chapter 1 Overview of the R12-Series Companion


Keyboard	4
Where to begin with your R12-Series Companion Keyboard.....	5
Step 1: Charge the keyboard	5
Step 2: Pair the Keyboard	6

Chapter 2 Using Your R12-Series Companion

Keyboard	7
Using your keyboard	7
Using the touchpad	8
Left- and right-click areas	8
Touchpad gestures	8
Using the Function keys	9
LED status light.....	9
Tips	10
Troubleshooting	10

Overview of the R12-Series Companion Keyboard

1

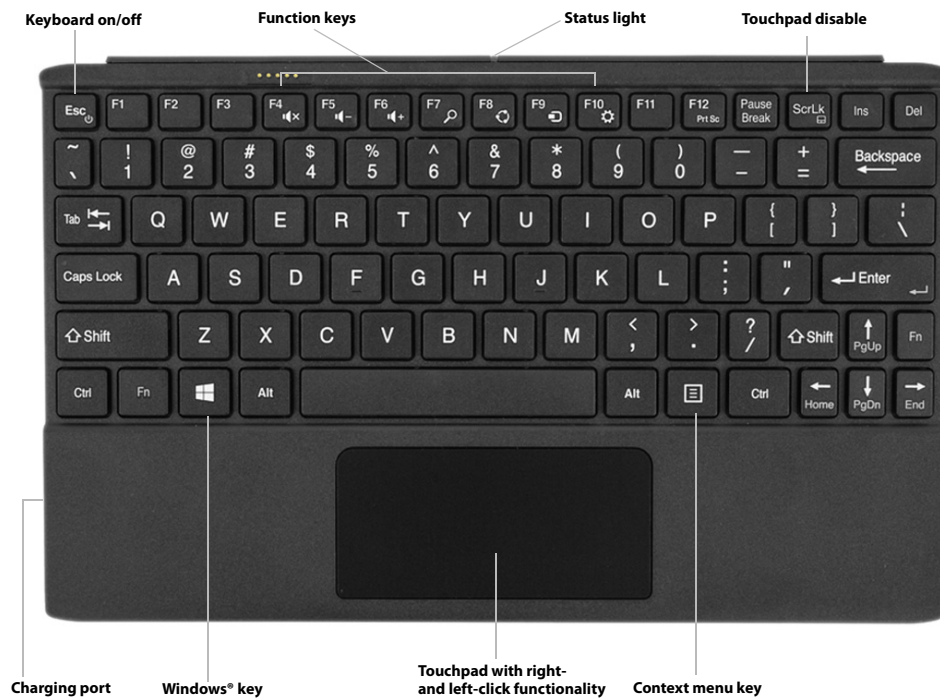

Keyboard on/off	Press Fn+Esc to power off the keyboard. To power on the keyboard, press Fn+Esc key again.
Function keys	Use these keys to mute or adjust the volume and open these Windows 8.1 menus: Search, Share, Devices, and Settings.
Status light	Displays status of pairing, power, charging, and enabling/disabling the keyboard and touchpad.
Touchpad disable	Press Fn+ScrLk to disable the touchpad. To enable the touchpad, press Fn+ScrLk again.

Charging port	Plug the Micro USB end of the charging cable (provided) into this port and plug the standard USB end of the cable into the USB port on the R12 Tablet PC or the R12 Docking Station to charge the keyboard.
Windows key	Press this key to open the Windows Start screen or the Windows desktop.
Touchpad	You can use the touchpad to move the cursor; scroll; tap and double-tap; drag and drop; for multiple text selection; and left- and right-click.
Context menu	Press this key to open the context menu, which is the menu that opens when you right-click on an object or the display.

Where to begin with your R12-Series Companion Keyboard

Step 1: Charge the keyboard

To ensure optimal performance, you should charge your keyboard before using it for the first time.

To charge the keyboard, use one of the following methods:

1. Plug the Micro USB end of the charging cable (provided) into the charging port on the keyboard and plug the standard USB end of the cable into the USB port on the R12 Tablet PC or the R12 Docking Station.

OR

2. Attach the keyboard to the back of the Tablet PC while the tablet PC is powered on. When the keyboard is charging, the LED status light on the top of the keyboard will be amber and will turn off when the keyboard is fully charged.


Please refer to the following table for complete charging information.

Charging Source	Power Source	Tablet On	Tablet in Sleep Mode	Tablet in Hibernate Mode	Tablet Off
Tablet battery	AC Power	Charging	Charging	Charging	Charging
Tablet battery	Tablet battery	Charging	Charging	Not Charging	Not Charging
Micro USB Cable	AC Power	Charging	Not Charging	Not Charging	Not Charging
Micro USB Cable	Tablet Battery	Charging	Not Charging	Not Charging	Not Charging

Step 2: Pair the Keyboard

To pair your keyboard with your R12 Tablet PC:

1. Ensure that your tablet is powered on.
2. If you're running Windows® 7, open Motion Dashboard, tap **Pen and Tablet**, and select the checkbox beside **Enable R12 Keyboard**.
3. If you're running Windows® 8.1, open Motion Tablet Center, tap **Power**, and tap the switch beside **Companion Keyboard** to turn it on.
4. Attach the keyboard to the back of the tablet as shown in the photo.

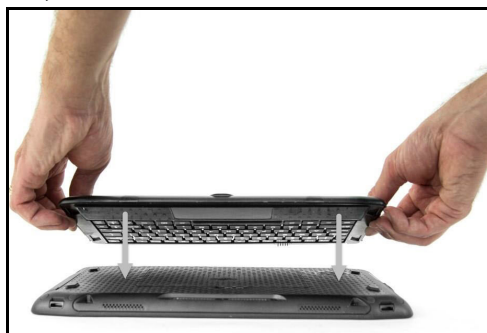

During the pairing process, the LED status light on the top of the keyboard will change colors and states as described in the table below.

LED Color	Behavior	Status
Green	Three-second slow blinking	The keyboard is pairing with the Tablet PC (if the keyboard is powered on).
Green	Blinking	If the keyboard is powered off and inserted into the kickstand, the LED blinks quickly to indicate power on, it then blinks slowly to indicate pairing in progress.
Amber	Blinking	Keyboard is powering off.
Amber	Steady on	The keyboard is charging.
Green	One-second blink	The keyboard is powered on (when keyboard is detached from the Tablet PC).

Using Your R12-Series Companion Keyboard

2

Using your keyboard

To use your keyboard:

1. Hold the Tablet PC upright and pull the kickstand out from the bottom of the tablet.




2. Remove the keyboard from the kickstand.



3. Place the keyboard on a flat surface in front of the Tablet PC.


Note: For successful operation, the keyboard and tablet must be within 30 inches of each other.

Using the touchpad

The touchpad on the R12-Series Companion Keyboard is enabled by default. To disable the touchpad, press **Fn+ScrLk** key . The status light will blink amber for one second to confirm that the touchpad is disabled. To enable the touchpad, press **Fn+ScrLk** again.






Left- and right-click areas

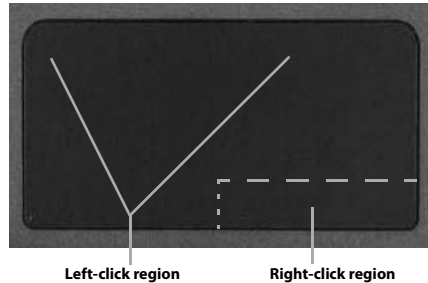The touchpad's right- and left-click regions are shown in the photo.



Touchpad gestures

The keyboard's touchpad supports the gestures listed in the following table.

Gesture	Action
	Move pointer horizontally, vertically, and diagonally
	Tap/double tap
	Drag and drop, multiple text selection
	Left-click, right-click
	Scroll

Using the Function keys

You can use the Function keys on the top row of the R12-Series Companion Keyboard to perform a variety of actions. Press **Fn** + a Function key to initiate the actions listed in the table below.

Function key	Action
Fn+Esc	Power off the keyboard. Press Fn+Esc again to power on the keyboard
Fn+F4	Mute
Fn+F5	Volume down
Fn+F6	Volume up
Fn+F7	Search menu (Windows 8.1 only)
Fn+F8	Share menu (Windows 8.1 only)
Fn+F9	Devices menu (Windows 8.1 only)
Fn+F10	Settings menu (Windows 8.1 only)

LED status light

The LED on the top of the keyboard provides status information about the keyboard. The table lists the LED colors, behavior, and keyboard/touchpad/battery status.

LED color	LED behavior	Keyboard status
Green	Blinks for 1 second	Keyboard is powering on
Green	Solid for 1 second	Touchpad is powering on
Amber	Solid for 1 second	Touchpad is powering off
Amber	Blinks for 1 second	Keyboard is powering off
Amber	Solid	Keyboard is charging
Amber	Turns off after 5 seconds after power is applied	Battery is fully charged
Green	Three-second slow blinking	The keyboard is pairing with the Tablet PC.
Amber	Constant blinking every 1 second	Battery charge is less than 5%
Amber	Constant blinking every 3 seconds	Battery charge is less than 15%

Tips

You can make the most of your R12-Series Companion Keyboard by following these tips:

- Use only the cable provided to charge your keyboard.
- You can use the keyboard while it's charging (when the charging cable is used).
- To prolong the keyboard battery life, recharge the keyboard when you see a low battery indicator light (amber blinking every one or three seconds).
- To put the keyboard in Airplane mode, press **Fn+Esc**. To wake the tablet from this mode, press **Fn+Esc** again.
- To put the keyboard in storage mode (which is useful if you won't be using the keyboard for an extended amount of time), press **B+H+U+F10** simultaneously for two seconds. To wake the keyboard from this mode, you'll need to apply power to the keyboard either by attaching it to the back of the tablet or by plugging in the charging cable.

Troubleshooting

The R12-Series Companion Keyboard has been thoroughly tested for performance and quality, but occasionally issues can still occur. If the recommended solutions in this section don't resolve your issue, contact Motion Computing Support: <http://www.motioncomputing.com/us/support>.

- Ensure that your keyboard and Tablet PC are fully charged.
- Ensure that the keyboard and Tablet PC are paired (See "Step 2: Pair the Keyboard" on page 6 for complete pairing instructions.)
- If you're running Windows 7, ensure that you have enabled the keyboard in Motion Dashboard (See "Step 2: Pair the Keyboard" on page 6).
- If you're running Windows 8.1, ensure that you have enabled the keyboard in Motion Tablet Center (See "Step 2: Pair the Keyboard" on page 6).
- Ensure that your keyboard and Tablet PC are no more than 30 inches away from each other.